



Glass Tags

MECHANICAL DIMENSIONS

- Dimension 2x12mm / 4x23mm / 4x34mm

PRODUCT HIGHLIGHTS

- White/white with transparent overlay

IC FEATURES

- Antenna In compliance with ISO standards for animal identification
- Interconnection Method Employs the most advanced technologies
- Construction Waterproof & high impact food compatible glass resistant
- Applications Pet (cat, dog, furrel etc. and Livestock (cattle, sheep, etc)

TRANSPONDER SPECIFICATIONS

- Materials Bio glass
- Weight 94mg / 0,65g / 1,05g

MECHANICAL PROPERTIES


- Operating Temperature -25°C to +85°C
- Shock & Vibration IEC 68.2.6 / IEC 68.2.29
- Chemical Resistance Diesel, Alcohol, Ethanol, Petroleum, Mineral oils
- Water Resistance IP 68

ELECTRICAL PROPERTIES

- Operating Frequency Low Frequency 134kHz
- Performance Developed to achieve the best ratio-size performance

APPLICATION SPECTRUM

- Glass Tag for electronic animal Identification

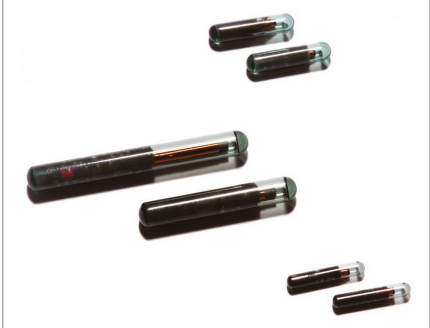

© STS Contactless
All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use.